



DESCH Slipping Hub

Load holding friction safety clutch

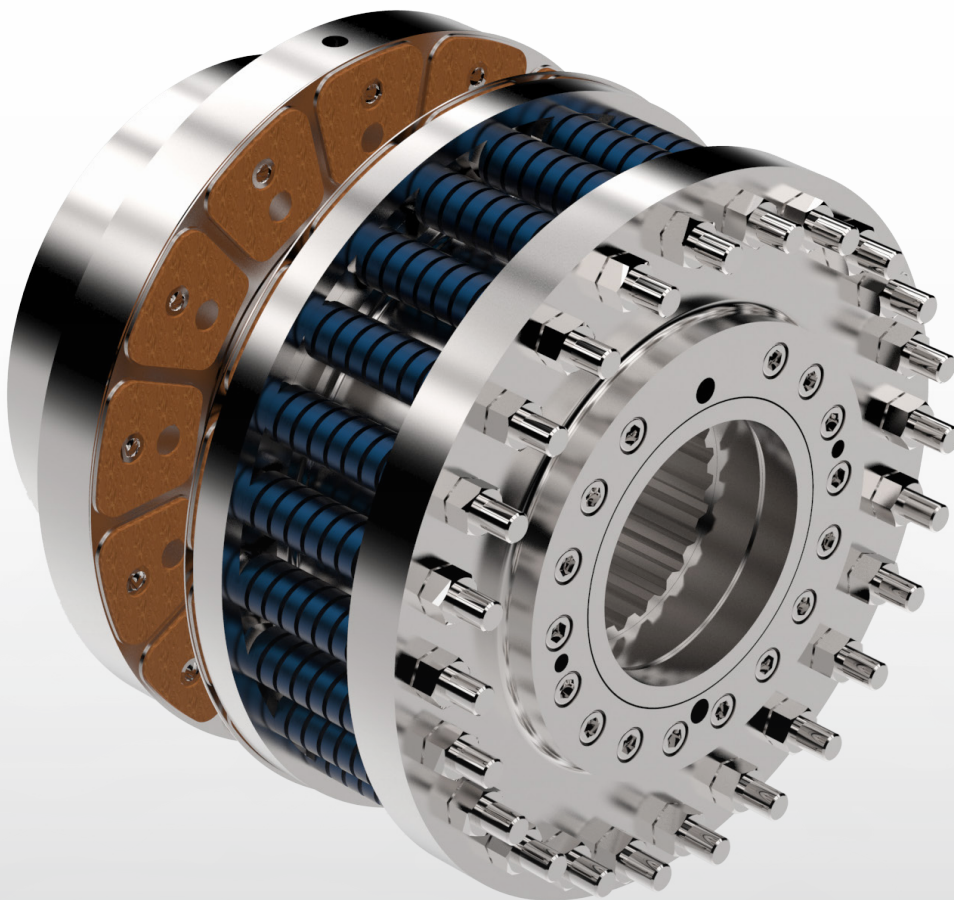


Main features of the DESCH slipping hub:

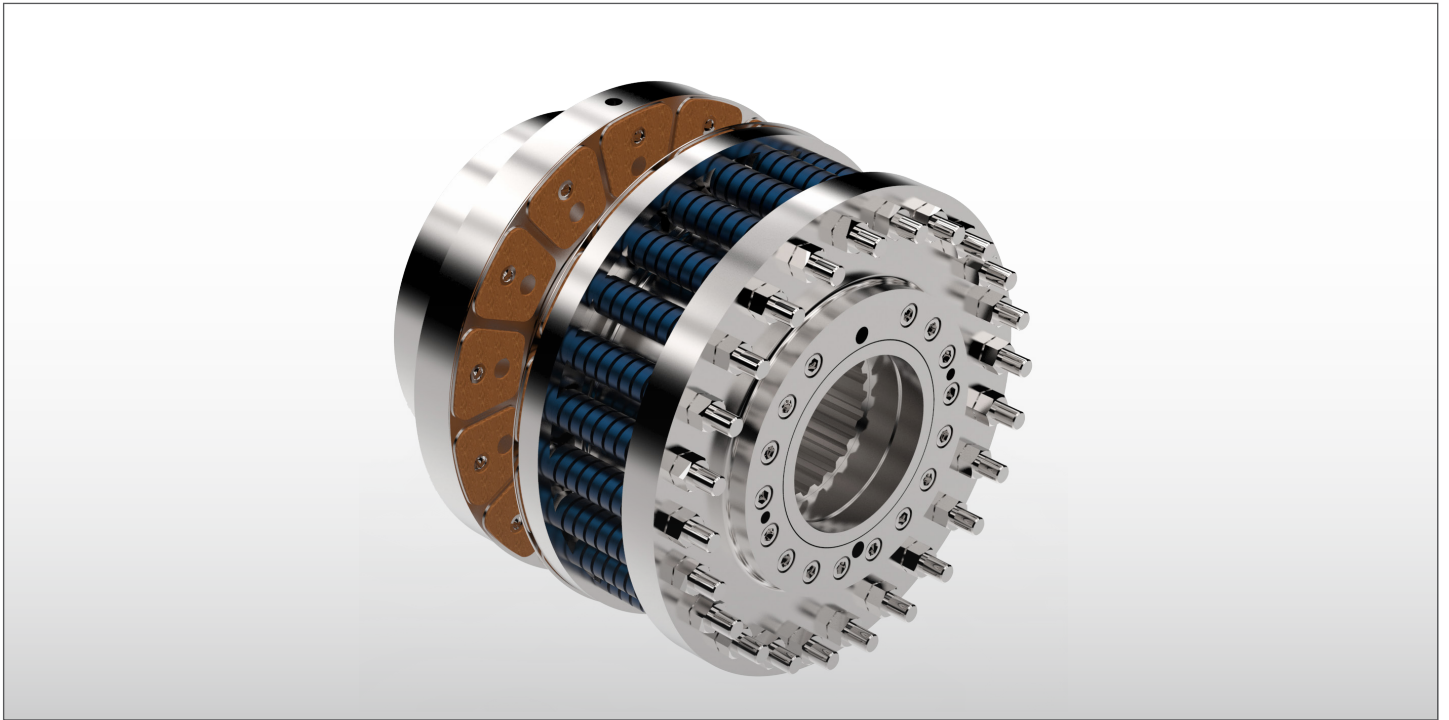

- Slipping hub with high power density due to special material
- Overload protection up to 50.000 Nm
- Torque can be set precisely for a wide power range
- Surface is galvanized and passivated
- Easy to install and operate

Technical data:

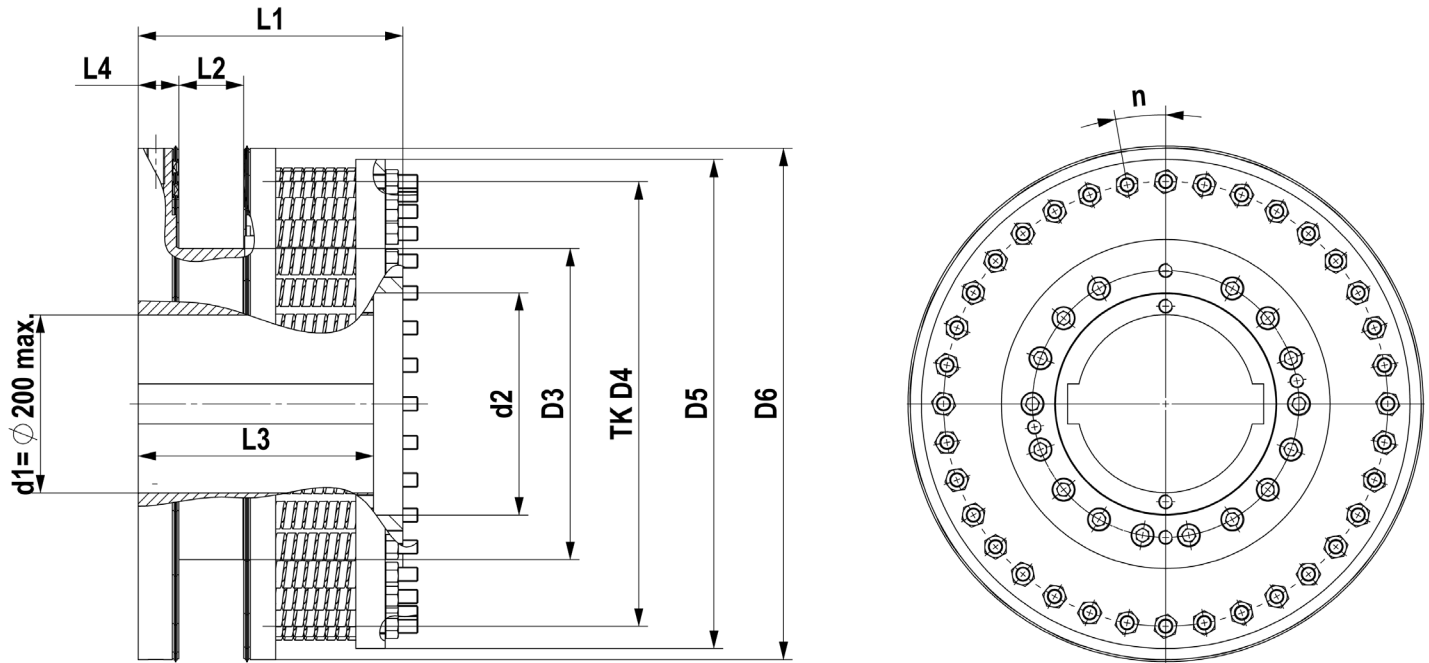

Size RN	max. slipping torque	d1 max.	d2	D3	TK D4	D5	D6	L1	L2	L3	L4
15	15.000 Nm	100	130	180	275	325	325	258	50	230	45
25	25.000 Nm	140	150	250	350	400	400	282	63	260	45
50	50.000 Nm	200	250	350	500	550	575	298	73	265	45

Dimension d1, d2 and L3 according to customers requirement
 Number of springs depending on the maximum slipping torque

CONTACT

Nidec DESCH Antriebstechnik GmbH & Co. KG
Postbox 1440
59753 Arnsberg/Germany
Kleinbahnstraße 21
59759 Arnsberg/Germany
T +49 2932 300 0
F +49 2932 300 899
info@desch.com
www.desch.com



DESCH China
Machinery (Pinghu) Co., Ltd.
No. 1680 Xingping 1 Road, Build. 3
Pinghu Economic Technological
Development Zone
314200 Zhenjiang P. R. China
T +86 573 8557 8988
F +86 573 8557 8989
desch.china@desch.com

DESCH Italia
DESCH Drive Technology
Official Representative
in Italy
Via G. Garibaldi, 3
20053 Rodano / Milano
Italy
T +39 02 477 58 426
desch.italia@desch.com

DESCH UK
DESCH Antriebstechnik
GmbH & Co. KG
Unit 2
38 Jubilee Road
Newtownards BT23 4YH
Northern Ireland
T +44 2890 020 996
uk.sales@desch.com

DESCH Canada Ltd.
240 Shearson Crescent
Cambridge
Ontario
Canada N 1T 1J6
T +1800 2631866
+1519 6214560
F +1519 6231169
desch.canada@desch.com

DESCH USA LP
Sales, Engineering,
Service Support
3700 Embassy
Parkway, Suite 530
Akron Ohio 44333
T +1 330 937 9030
F +1 330 937 9031
sales.usa@desch.com

DESCH USA LP
Manufacturing,
Assembly
4940 Merrifield Rd
Dallas
Texas 75236
desch.dallas@desch.com