

DESCH GC-ECO

Gear Couplings



DESCH Gear Coupling's - types

	<p>GC - Standard coupling - Small Sizes GC 50 - GC 220</p>		<p>GCL - with extended hubs</p>
	<p>GC - Standard coupling - Large Sizes GC 240 - GC 600</p>		<p>GCT - with shear pins</p>
	<p>GCY - with one-piece sleeve</p>		<p>GCB - with brake disc</p>
	<p>GCLE - with intermediate shaft</p>		<p>GCV - for vertical drives</p>
	<p>GCX - with spacer sleeve</p>		<p>GCTAM - Special type for winder</p>

Further types available on request!

DESCH Gear couplings GC-ECO



Type GC-ECO

- Economic standard coupling
- Special types are possible in short delivery times

Gear Couplings GC-ECO

DESCH gear couplings GC-ECO are economic and torsionally stiff shaft connections suitable for a positive torque transmission. They ensure the flexible compensation of shaft misalignments as well. The gear coupling is made of high tensile steel with grease lubrication and O-ring seal.

DESCH gear couplings GC-ECO are used in all areas of mechanical engineering and offers a long service life with maximum reliability, resulting from the optimal grease lubrication of the crowned spline. The couplings are generally suitable for a horizontal assembly. Special types are suitable for vertical assembly, too.


The range of gear couplings ECO includes standard sizes from 52 to 280 with torque transmissions from 1.900 Nm to 200.000 Nm, these are suitable for shaft diameters from 20 mm to 280 mm.

Bigger shaft diameters and higher torques are possible on request.




Special types, adapted to your application requirements, are possible in a short delivery time!

Tooth principle

The crowned spline principle results in case of angular and radial misalignment the avoidance of edge pressure in the spline. Optimal friction conditions of the spline with an almost wear-free operation, resulting due to the permanent grease lubrication, leads to a long service life expectancy of the coupling.

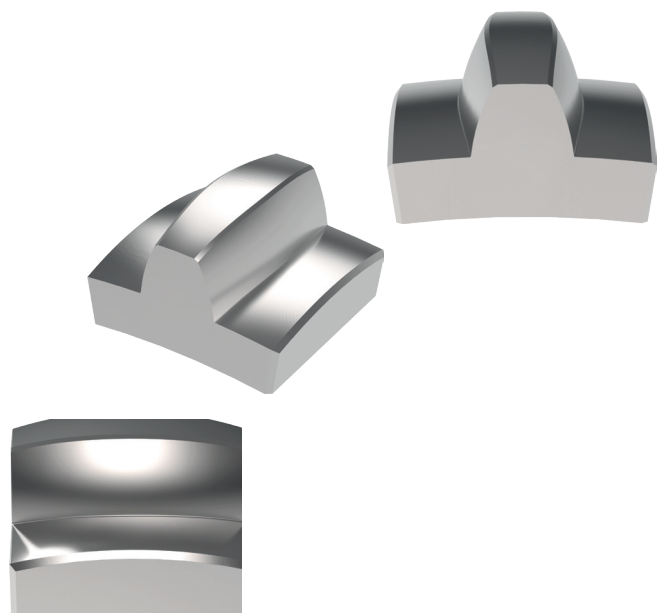


DESCH Gear couplings GC-ECO

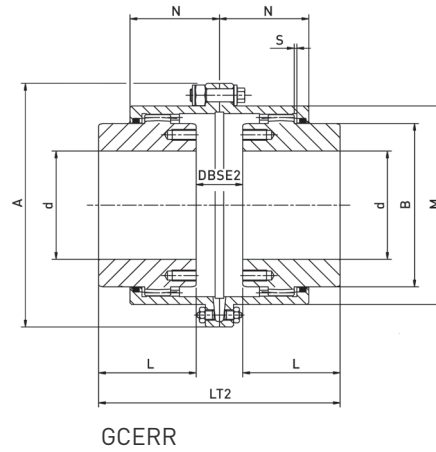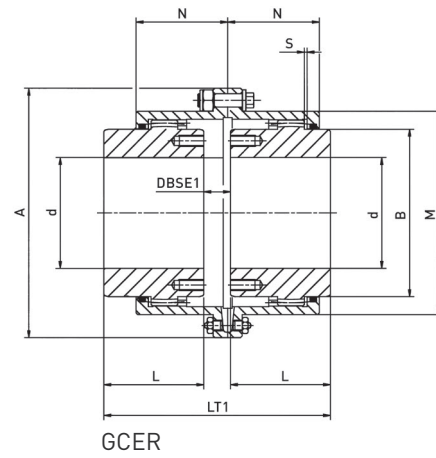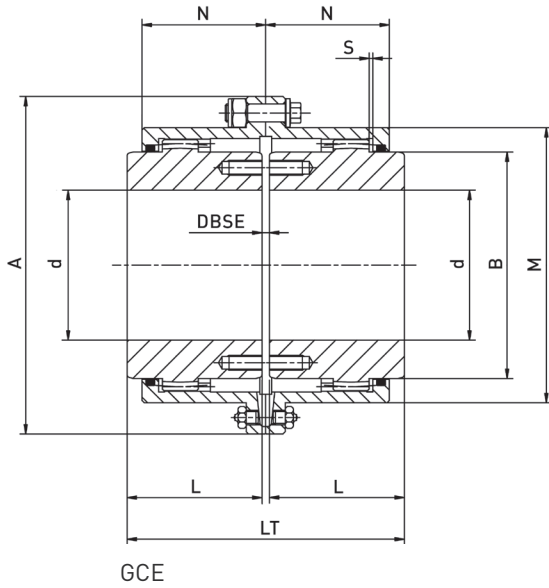


Size	d _{max} mm	A mm	M mm	B mm	L mm	L1 mm	LT mm	LT1 mm	LT2 mm	LT3 mm	LT4 mm	N mm	Y mm	DBSE mm	DBSE1 mm	DBSE2 mm
52	52	111	82,5	68	43	105	89	91	93	151	213	39	12	3	5	7
62	62	142	104,6	86	50	115	103	108	113	168	233	45,5	16	3	8	13
78	78	168	130,5	105	62	130	127	138	149	195	263	59	22	3	14	25
98	98	200	158,4	132	76	150	157	170	184	231	305	68	26	5	18	32
112	112	225	183,4	151	90	170	185	204	223	265	345	82,5	38	5	24	43
132	132	265	211,5	179	105	185	216	237	258	296	376	93	45	6	27	48
156	156	300	245,5	209	120	215	246	272	298	341	436	106	50	6	32	58
174	174	330	275	234	135	245	278	307	336	388	498	118	58	8	37	66
190	190	370	307	255	150	295	308	350	392	453	598	138	70	8	50	92
210	210	406	335	280	175	300	358	403	448	483	608	154	80	8	53	98
233	233	439	367	306	190	305	388	438	488	503	618	166	86	8	58	108
280	280	505	423	356	220	310	450	512	574	540	630	193	96	10	72	134

$S = DBSE/2$

Technical data

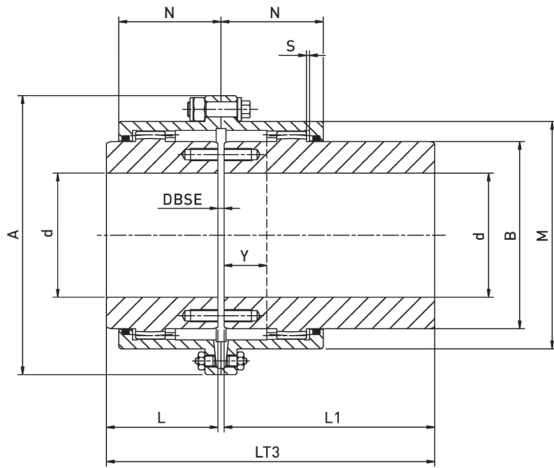

GCEL

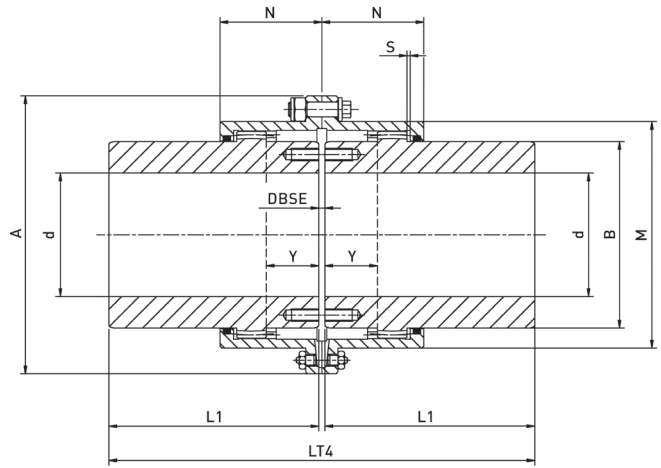

GCELL

Size	Torque		Max. speed rpm	GCE / GCER / GCERR weight kg	GCEL weight kg	GCELL weight kg
	T_k Nm	$T_{max.}$ Nm				
52	1.900	3.800	6000	4,2	6,15	8
62	2.900	5.800	4550	7,6	10,2	13
78	5.700	11.400	4000	13,5	18,2	23
98	9.000	18.000	3900	25	33	41
112	14.500	29.000	3700	37	48,5	60
132	22.800	45.600	3550	60	56,5	91
156	34.800	69.600	3000	90	115	141
174	45.800	91.600	2750	124	161	199
190	70.800	141.600	2420	170	227	285
210	85.400	170.800	2270	233	292	352
233	150.000	300.000	1950	298	363	428
280	200.000	400.000	1730	457	526	596

Selection

For the selection of a GC - Coupling following information are required:

- P_N Motor power respectively input power (kW)
- n Operating speed (rpm)
- L, d Length and diameter of the shafts (mm)
- S Safety factor, table page 11

Where required other geometrical or environmental restrictions.

The torque of the machine T_{AN} is determined by:

This torque T_{AN} multiplied by a safety factor S depending on the application gives the required nominal coupling torque T_{KN} .

$$T_{AN} \text{ [Nm]} = 9550 \times \frac{P_N \text{ [kW]}}{n \text{ [rpm]}}$$

$$\text{Result: } T_{KN} = S \times T_{AN}$$

The coupling must be selected with a nominal torque T_{KN} higher than the calculated value.

Furthermore must be checked that the peak torque of the application is lower than the max. torque T_{Kmax} of the coupling.

In case that bigger shock or changing load occur we recommend a revision according to DIN 740. An adequate calculation program is available. For such a revision the following information is required:

1. Kind of the driving machine
2. Kind of the driven machine
3. Power of driving and driven machines
4. Starts per hour
5. Shock loads
6. Exciting loads
7. Moments of inertia of load- and driving sides
8. Ambient temperature

Selection example for IEC standard motors

Given Data of the application

Driving machine: Electric motor

Power of the motor: $P = 400 \text{ kW}$

Speed: $n = 500 \text{ rpm}$

Driven machine: Rotary furnace

$$T_{AN} \text{ [Nm]} = 9.550 \times \frac{400 \text{ kW}}{500 \text{ rpm}} = 7.640 \text{ Nm}$$

$$T_{KN} = 2,5 \times 7.640 \text{ Nm} = 19.100 \text{ Nm}$$

Selection: DESCH GC size 150

$$T_{KN} = 35.500 \text{ Nm}$$

Safety factors „S“

Assignment of load characteristics according to type of working machine			
	DREDGERS		RUBBER MACHINERY
S	Bucket conveyor	S	Extruders
S	Landing gear (caterpillar)	M	Calenders
M	Landing gear (rail)	S	Kneading mill
M	Manoeuvring winches	M	Mixers
M	Pumps	S	Rolling mills
S	Impellers		
S	Cutter heads		WOOD WORKING MACHINES
M	Slewing gear	S	Barkers
		M	Planing machines
		G	Wood working machines
		S	Saw frames
			CRANES
		G	Luffing gear block
		S	Travelling gear
		G	Hoist gear
		M	Slewing gear
		M	Derricking jib gear
			PLASIC INDUSTRY MACHINES
		M	Extruders
		M	Calenders
		M	Mixers
		M	Crushers
			METAL WORKING MACHINES
		M	Plate bending machines
		S	Plate straightening machines
		S	Hammers
		S	Metal planning machines
		S	Presses
		M	Shears
		S	Forging presses
		S	Punch presses
		G	Countershafts, line shafts
		M	Machine tools (main drives)
		G	Machine tools (auxiliary drives)
			FOOD INDUSTRY MACHINERY
		G	Bottling and container filling machines
		M	Kneading machines
		M	Mash tubs
		G	Packaging machines
		M	Cane crushers
		M	Cane cutters
		S	Cane mills
		M	Sugar beet cutters
		M	Sugar beet washing machines
			PAPER MACHINES
		S	Couches
		S	Glazing cylinders
		M	Pulper
		S	Pulp grinders
		M	Calenders
		S	Wet presses
		S	Willows
		S	Suction presses
		S	Suction rolls
		S	Drying cylinders
			PUMPS
		S	Piston pumps
		G	Centrifugal pumps (light liquids)
		M	Centrifugal pumps (viscous liquids)
		S	Plunger pumps
		S	Press pumps
			STONE AND CLAY WORKING MACHINES
		S	Crusher
		S	Rotary furnace
		S	Hammer mills
		S	Ball mills
		S	Tube mills
		S	Beater mills
		S	Brick presses
			TEXTILE MACHINES
		M	Batchers
		M	Printing and dyeing machines
		M	Tanning vats
		M	Willows
		M	Looms
			COMPRESSORS
		S	Piston compressors
		M	Turbo compressors
			METAL ROLLING MILLS
		S	Plate shears
		M	Manipulator for turning sheets
		S	Ingot pushers
		S	Ingot and slabbing-mill train
		S	Ingot handling machinery
		M	Wire drawing benches
		S	Descaling machines
		S	Thin plate mills
		S	Heavy and medium plate mills
		M	Winding machines (strip and wire)
		S	Cold rolling mills
		M	Chain tractor
		S	Billet shears
		M	Cooling beds
		M	Cross tractor
		M	Roller tables (light)
		S	Roller tables (heavy)
		M	Roller straighteners
		S	Tube welding machines
		M	Trimming shears
		S	Cropping shears
		S	Continuous casting plant
		M	Rollers adjustment drive
		S	Manipulators
			LAUNDRIES
		M	Tumblers
		M	Washing machines
			WATER TREATMENT
		M	Aerators
		M	Screw pumps

Safety factors „S“			
Driving machines	Load characteristics of the working machine		
	G	M	S
Electric motors, turbines	1,5	2	2,5
Hydraulic motors	2	2,5	3
Combustion motors	2,5	3	3,5

CONTACT

Nidec DESCH Antriebstechnik GmbH & Co. KG
 Postbox 1440
 59753 Arnsberg/Germany
 Kleinbahnstraße 21
 59759 Arnsberg/Germany
 T +49 2932 300 0
 F +49 2932 300 899
 info@desch.com
www.desch.com



DESCH China
 Machinery (Pinghu) Co., Ltd.
 No. 1680 Xingping 1 Road, Build. 3
 Pinghu Economic Technological
 Development Zone
 314200 Zhejiang P. R. China
 T +86 573 8557 8988
 F +86 573 8557 8989
desch.china@desch.com

DESCH Italy
 Drive Technology
 Ufficio di rappresentanza
 in Italia
 Via Cavriana, 3
 20134 Milano/Italy
 T +39 02 7391 280
 F +39 02 7391 410
desch.italia@desch.com

DESCH UK
 DESCH Antriebstechnik
 GmbH & Co. KG
 Unit 2
 38 Jubilee Road
 Newtownards BT23 4YH
 Northern Ireland
 T +44 2890 020 996
uk.sales@desch.com

DESCH Canada Ltd.
 240 Shearson Crescent
 Cambridge
 Ontario
 Canada N 1T 1J6
 T +1800 2631866
 +1519 6214560
 F +1519 6231169
desch.canada@desch.com

DESCH USA LP
 Sales, Engineering,
 Service Support
 3700 Embassy
 Parkway, Suite 530
 Akron Ohio 44333
 T +1 330 937 9030
 F +1 330 937 9031
sales.usa@desch.com

DESCH USA LP
 Manufacturing,
 Assembly
 4940 Merrifield Rd
 Dallas
 Texas 75236
desch.dallas@desch.com