


DESCH Revox® Gearbox - All in One

“The” drive solution for mobile crushers

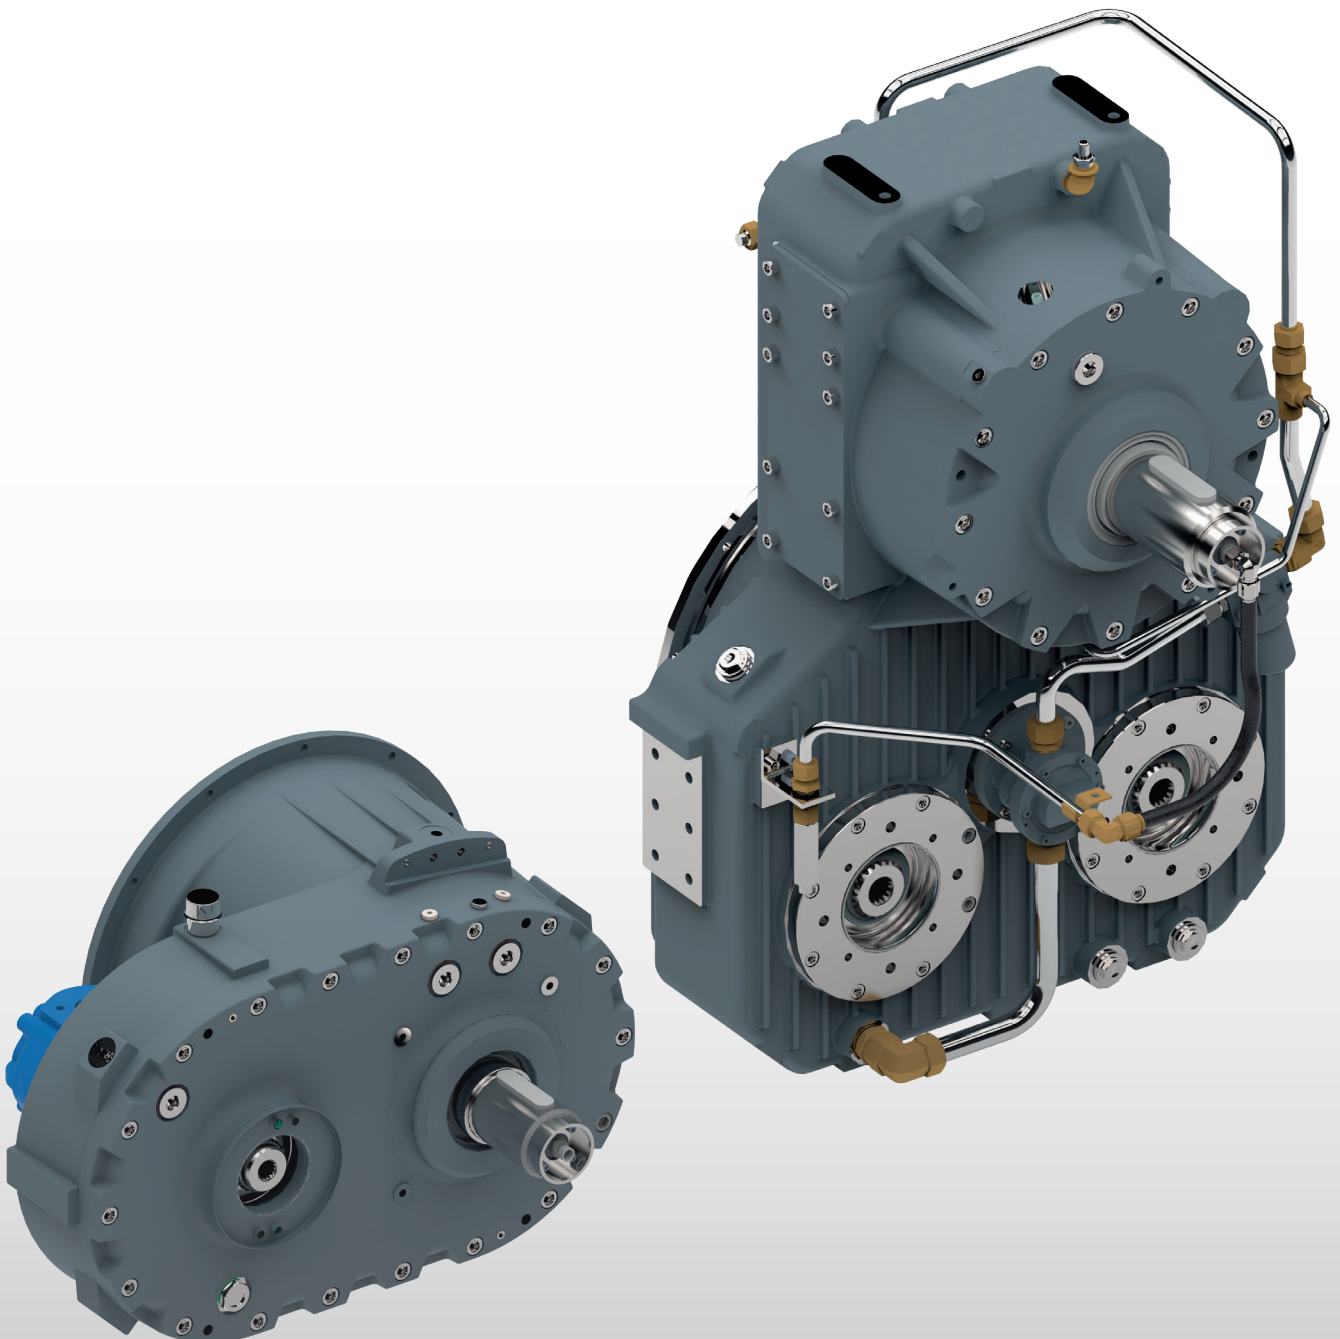


DESCH Revox® Gearbox

Rising costs for energy and waste disposal, as well as increasing raw material shortages, are calling for innovative, environmentally friendly system solutions. Here, the drive train is of particular significance.

Thanks to the new **Revox®** drive concept, a gear coupling unit, it has become possible to combine an energy-saving direct drive with the versatility of hydraulic drive technology. The core of this drive system is a power-split drive train.

A hydraulic motor mounted either takes care of the starting process to ensure gentle, safe running-up of the crusher rotor. Highly sensitive electronic control systems can be dispensed with.

The option of reversibility is particularly important in jaw cutters. For removing blockages in the crushing jaw as well as with various materials (such as bitumen), it is possible to operate the machine in reverse with the help of a hydraulic motor - and with full cutting torque.

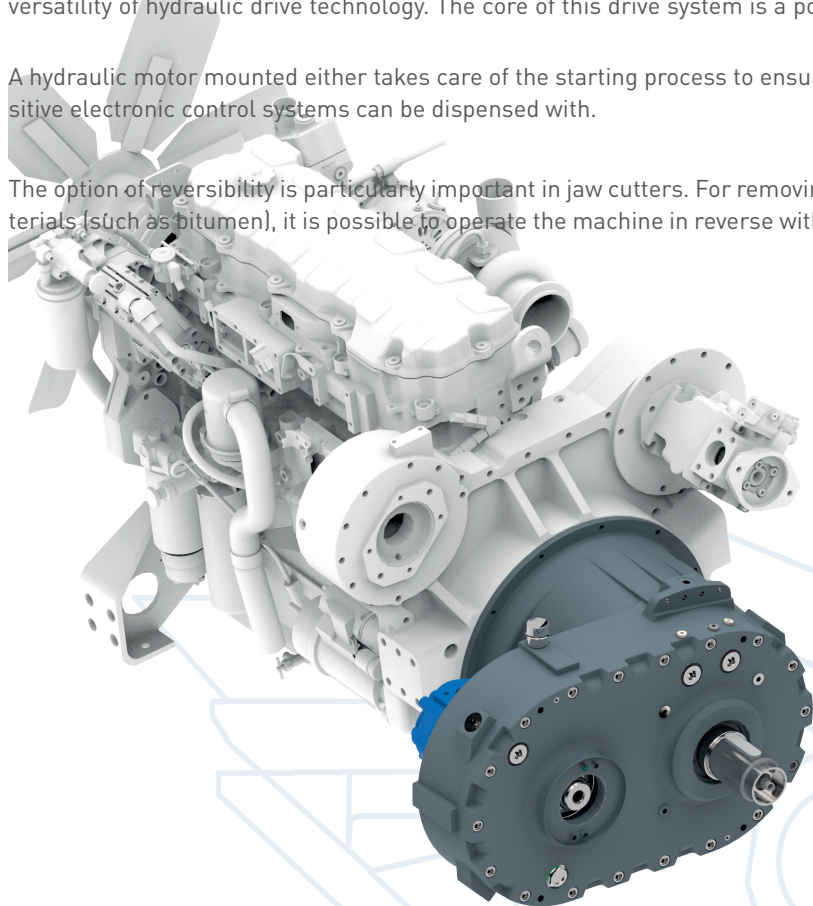

ADVANTAGES Revox® S - Gearbox

- Hydraulic soft start
- Almost wear-free clutch operation
- Mechanical direct drive
- Energy-efficient by a disconnectable start-up motor as standard
- Robust design by standard parts
- Wet operating clutch

Technical data Revox® S

Max. power:	280 kW
Max. torque:	1800 Nm
Idle speed:	800 rpm
Max. speed:	2100 rpm
Ratio hydraulic pump:	i = 1,31
Clutch pressure:	40 bar

The new **Revox® S** compose a standard gear unit to start-up high rotatory inertia in particular for crushing operation.


Drive systems for constant speed engines are subject to high requirements during acceleration of the rotor.

Due to the high engagement speed of the clutch an increase of the performed friction work raised which lead to a high wear.


The **Revox® S** dispose of a hydraulic soft start system which handle the risk of high friction work by a soft start-up device which means of a hydraulic gear motor. This enables a wear reduced start-up procedure even at high engine speeds up to 1500 rpm.

During operating mode a robust wet clutch transmit the engine torque. The mechanical direct drive system lead to a energy-efficient drive solution.

The **Revox® S** is provided with a SAE B-B hydraulic pump connection by default.



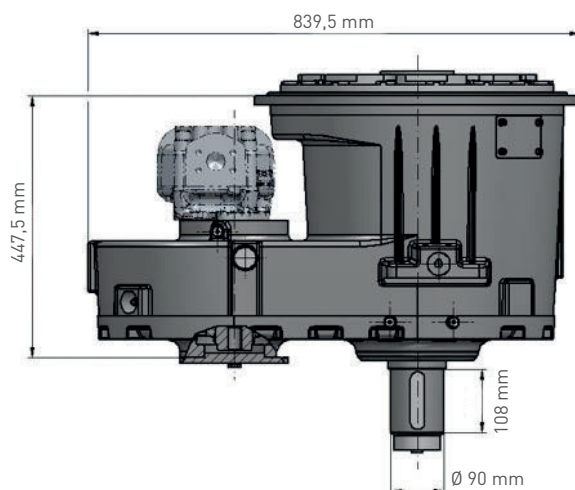


"The" drive solution for mobile crushers

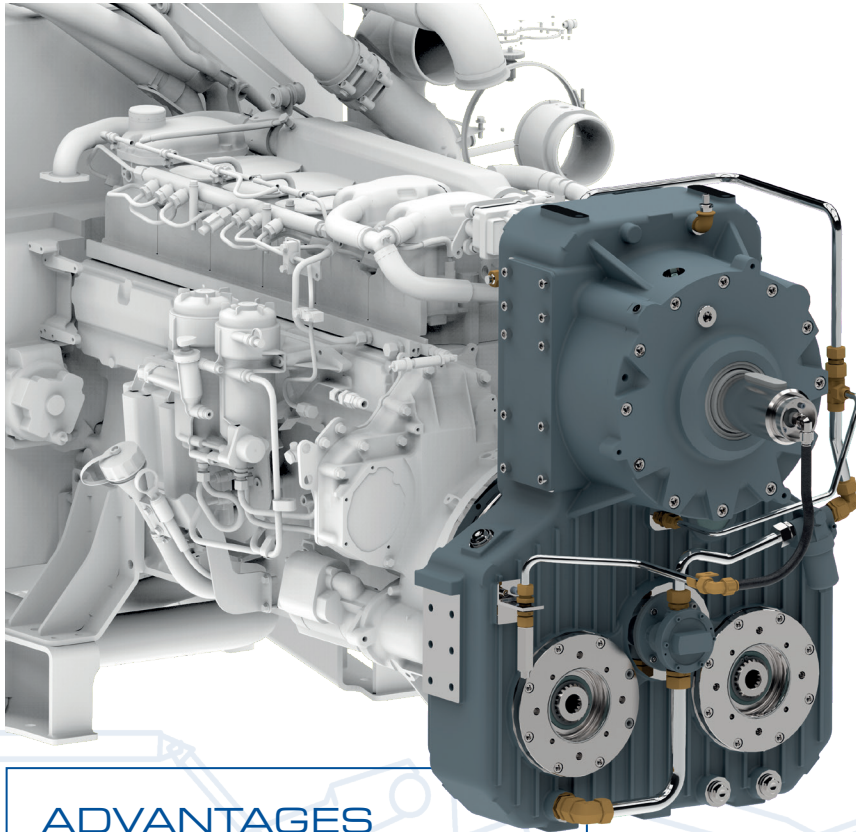


ADVANTAGES Revox® - Gearbox


- Hydraulic soft start
- Almost wear-free clutch operation
- Mechanical direct drive
- Reverse drive option by max. torque
- Disconnectable start-up motor as an option
- Robust design by standard parts
- High availability
- Flexible application
- Wet operating clutch

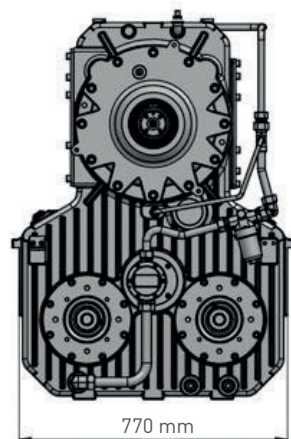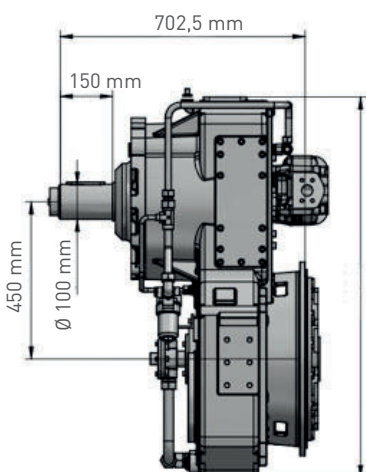

Revox® - standard

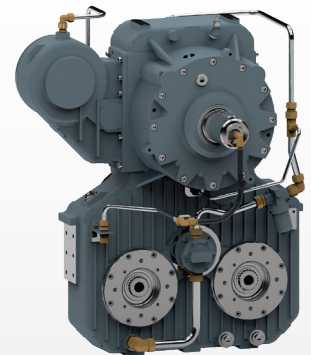

Revox® - with third pump connection



Revox® - with reverse drive

Technical data Revox®

Max. Power:	400 kW
Max. torque:	2500 Nm
Idle speed:	800 rpm
Max. speed:	2100 rpm
Ratio output:	$i = 1,41$
Ratio hydraulic pump:	$i = 0,78$
Operating pressure:	200 bar
Clutch pressure:	40 bar

CONTACT

Nidec DESCH Antriebstechnik GmbH & Co. KG
 Postbox 1440
 59753 Arnsberg/Germany
 Kleinbahnstraße 21
 59759 Arnsberg/Germany
 T +49 2932 300 0
 F +49 2932 300 899
 info@desch.com
www.desch.com



DESCH China
 Machinery (Pinghu) Co., Ltd.
 No. 1680 Xingping 1 Road, Build. 3
 Pinghu Economic Technological
 Development Zone
 314200 Zhenjiang P. R. China
 T +86 573 8557 8988
 F +86 573 8557 8989
desch.china@desch.com

DESCH Italia
 DESCH Drive Technology
 Official Representative
 in Italy
 Via G. Garibaldi, 3
 20053 Rodano / Milano
 Italy
 T +39 02 477 58 426
desch.italia@desch.com

DESCH UK
 DESCH Antriebstechnik
 GmbH & Co. KG
 Unit 2
 38 Jubilee Road
 Newtownards BT23 4YH
 Northern Ireland
 T +44 2890 020 996
uk.sales@desch.com

DESCH Canada Ltd.
 240 Shearson Crescent
 Cambridge
 Ontario
 Canada N 1T 1J6
 T +1800 2631866
 +1519 6214560
 F +1519 6231169
desch.canada@desch.com

DESCH USA LP
 Sales, Engineering,
 Service Support
 3700 Embassy
 Parkway, Suite 530
 Akron Ohio 44333
 T +1 330 937 9030
 F +1 330 937 9031
sales.usa@desch.com

DESCH USA LP
 Manufacturing,
 Assembly
 4940 Merrifield Rd
 Dallas
 Texas 75236
desch.dallas@desch.com